



BNT

BATTERY



INTELLIGENT MONITORING

Real-time monitoring of product performance



MULTIPLE SAFETY PROTECTION

Short-circuit/Overcharge/Overpower/Over-current /Temperature/Over-voltage protection



HIGH POWER

2000W High Power,bring appliances outdoors



TOUCH SCREEN CONTROL PANEL

Real-time display,intuitive operation and more stylish basic data



BIG CAPACITY

Longer using time,no capacity anxiety



FAST CHARGING

Support fast charging 2-3 hrs;Multi-port Input support mains input/solar panel charging



LED LIGHTING

Multiple functions:High-Light/ Low-light/ SOS/Flash



MULTI-PORT OUTPUT

Support multiple AC/USB/DC port output

BASIC DATA

Weight	24kg
Size	L462*W252*H335mm
Cell	Lithium Iron(LiFeP04)
Capacity	2304Wh
Life Cycles	>3000 times
Charging Time	2.5-3H, Charge from 0% to 100% (automatic cut-off)
LED Lighting	6W,High/Low light,SOS, Flash
Discharging Temperature	-20°C~45°C
Charging Temperature	0°C~45°C

USB OUTPUT

USB-A1	QC3.0 MAX 20V/3A(60W) ;TYPE-C2 and USB-A1charge at the same time,output is 5V/5A
USB-A2	QC3.0 MAX 12V/1.5A(18W)
TYPE C1	QC3.0 MAX 12V/1.5A(18W)PD MAX 12V/2.5A(30W); Independent output
TYPE-C2	PD/QC3.0 MAX 20V/5A(100W)

DC OUTPUT



DC1 Output	12V/10A(120W) MA
DC2 Output	12V/10A(120W) MA
Cigarette Output	12V/10A(120W) MAX

AC OUTPUT

AC Output	2X AC Power Output Of Pure Sine wave(AC220V ±5%)
Output Power	Pure Sine wave 2000W; MAX 2200W
Output Peak Power Max	2200W:keeping time <50m
Frequency	50HZ

INPUT

DC5521	10~45V/10A; support Solar panel PPT
XT60	10~45V MAX400W; support Solar panel PPT
AC Input	180V~250V, MAX 1000W

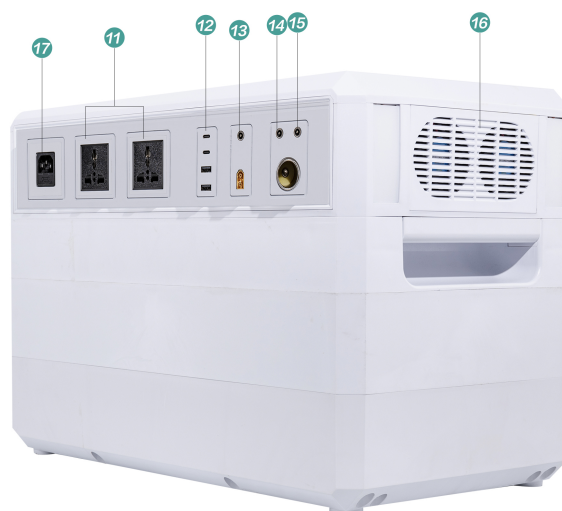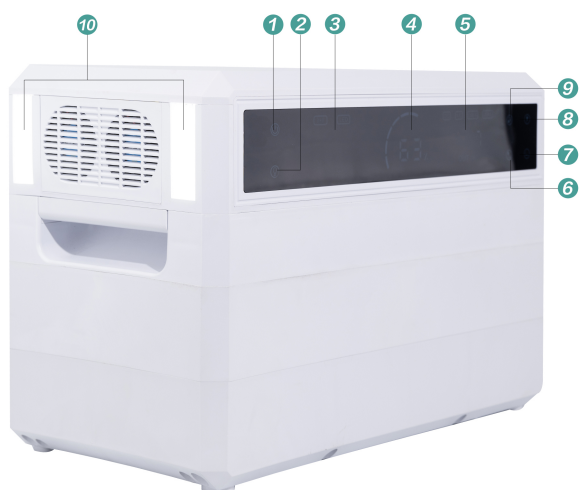

Model:BNT-P2300

- | | | |
|-------------------------|------------------------|-------------------------------|
| ① MAIN SWITCH | ② LED LIGHTING SWITCH | ③ INPUT POWER DISPLAY |
| ④ POWER DISPLAY | ⑤ OUTPUT POWER DISPLAY | ⑥ USB/PD SWITCH |
| ⑦ DC OUTPUT SWITCH | ⑧ AC START SWITCH | ⑨ WIRELESS CHARGING SWITCH |
| ⑩ LED LIGHTING | ⑪ AC OUTLET | ⑫ USB/PD OUTPUT |
| ⑬ IN CHARGING PORT | ⑭ DC 12V10A | ⑮ CIGARETTE LIGHTER INTERFACE |
| ⑯ HEAT DISSIPATION HOLE | ⑰ AC INPUT INTERFACE | |



Mobile Phone
132 Times



Lights
50 Hrs



Fan
26 Hrs



Laptop
57 Hrs

XIAMEN BNT BATTERY CO.,LTD

Tel: +86-0596-6032128

E-mail: sales@bntbattery.com

website: www.bntbattery.com

Add: NO.350,Changle Road,Huli District,Xiamen,China