



GOLF CART



FORK LIFT



SCISSOR LIFT



PORTABLE  
POWER



POWER  
STORAGE

## APPLICATIONS



**BNT**  
BATTERY

THE EXPERT OF LITHIUM

# LITHIUM ION BATTERY DATASHEET



5 YEARS ★  
WARRANTY

AVAILABLE IN :

**150AH**

**51.2V**

LiFePo4 Battery  
Drop-in Replacement



Zero Maintenance



Long Life Span



Light Weight




High Performance



Max Power



No Emission

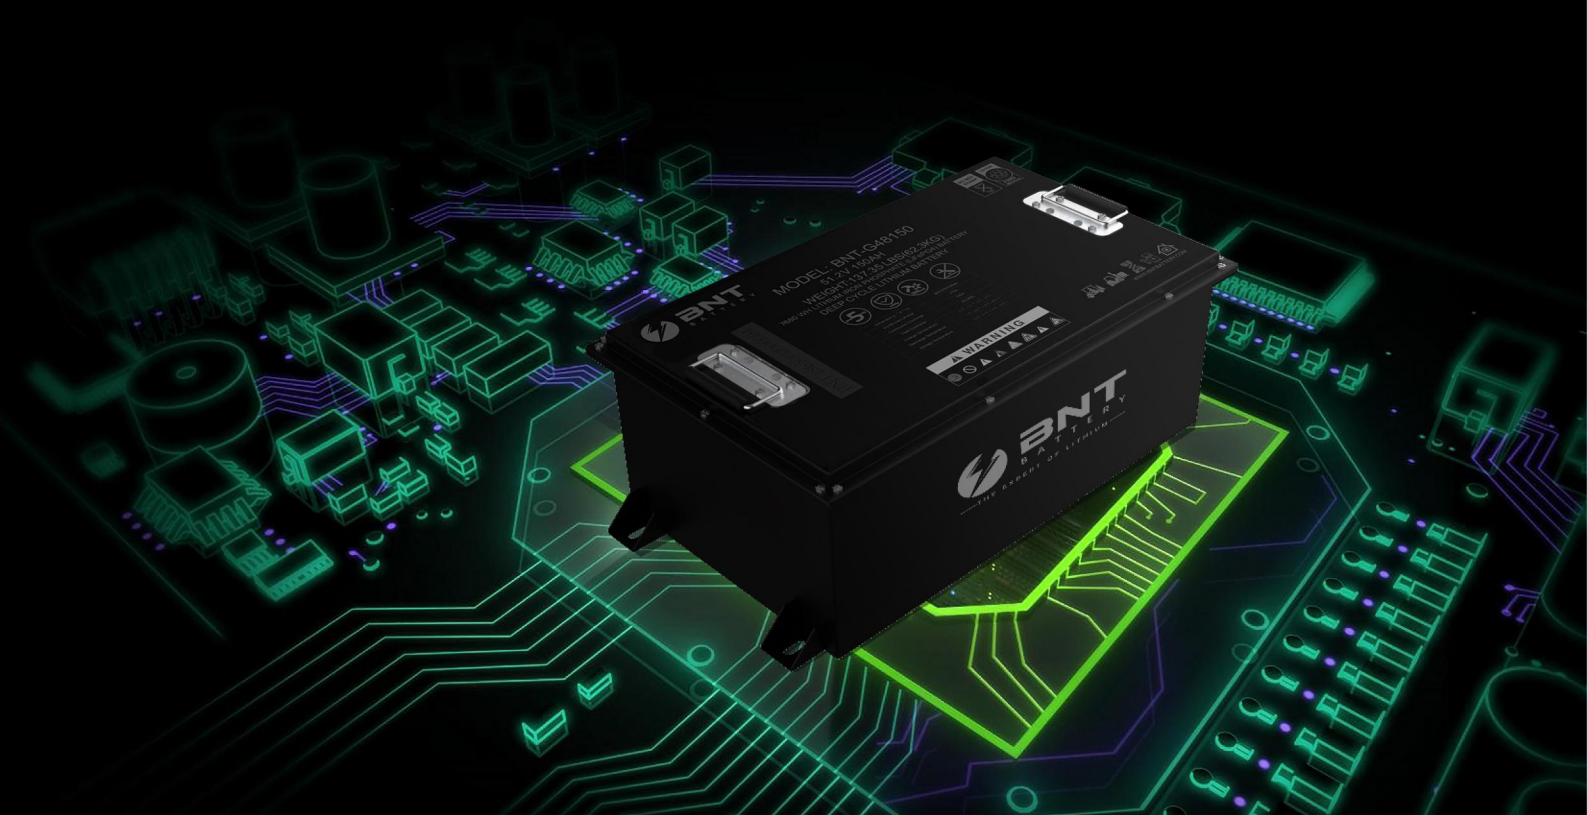

## A BETTER BATTERY WITH MORE POWER IN LESS SPACE


**BNT** Lithium Ion Iron Phosphate (LiFePO<sub>4</sub>) battery uses certified cells. Equipped with redundant safety features, the BNT lithium battery is the safest in the market today. Specifically designed to withstand the harsh operating environments of marine and vehicle applications, the BNT lithium battery lasts up to 3500 cycles compared to a traditional lead acid or AGM battery, which typically lasts 400-500 cycles.

**BNT** range features a Lithium Phosphate (LiFe PO<sub>4</sub>) battery constructed utilising individual 3.2V3200mAh cells in series and parallel. These Lithium cells are controlled by the BNT Battery Management System (BMS). Customised BMS allows the BNT battery to perform safely without the fear of thermal runaway and explosion. Another crucial feature of the BNT BMS is to equalise all individual Lithium cells in the battery ensuring longevity.


**Customisation** ensures the BNT battery range can be retrofitted into a range of space restrictive areas. Thanks to the BNT ranges flexibility. The BNT lithium battery offers exceptional power density and is also available with a heating blanket option if installation is outside the main cabin. With the Bluetooth connection enabled gathering real time data from the battery is incredibly simple and always accurate.


### FEATURES

 Fast Charging - No cool-down period required


 Internal BMS - BMS keeps track of battery's health parameters, thermal management and charging


 Cell Balancing - extends lifetime of battery


 Zero Emission - Lithium-ion batteries have no emissions during charging

 The energy density of Li-ion is very high, Long cycle life: 3500 cycles @ 80 %DOD

 Lithium-ion batteries have no memory effect

 The capacity of a Li-ion battery is almost not influenced by high discharge currents, while High discharge currents reduce seriously the capacity of a lead-acid battery

 The Li-ion battery is much lighter than the conventional lead-acid battery, this can give an important saving in the construction and reduces the energy consumption for mobile system

 The reduction of capacity for Li-ion batteries is much smaller what makes them very useful for low temperature operations





Front View



TOP View



Side View

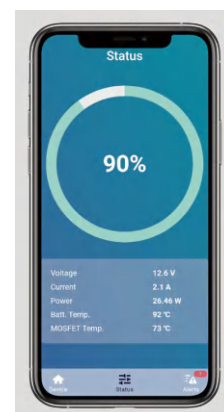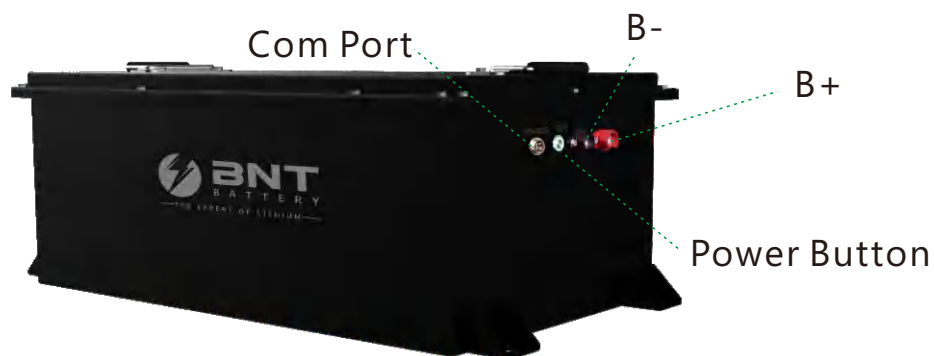

### BNT BATTERY MOBILE APP

.Connect With Bluetooth  
.Monitor Battery



## On /Off Board Charger



BNT products are lithium-ion battery packs with integrated golf cart battery system. They are designed to replace the lead-acid batteries and are available for drop-in replacement in Club Car, EZ-GO, Yamaha, StarEV, Tomberlin ., etc, vehicles easily .

The casing of a battery charger shall have the strength and rigidity necessary to resist the abuses to which it may be subjected, without resulting in a risk of fire. The casing of a user-replaceable battery charger shall have the strength and rigidity necessary to resist the abuses to which it may be subjected without resulting in a risk of injury to persons.



## Charger Specifications

Battery pack rated voltage	48V
Maximum charger output	68V
AC input voltage range	85-270VAC; 45-65Hz
AC input current value	11.5A@120VAC; 6.1A@220VAC
Power factor	$\geq 0.99$
Charger efficiency	$\geq 95\%$
Noise	$\leq 45\text{dB}$
IP Class	Ip67
Weight	9.3lb(4.2kg)
Operating temperature	-86°F to 149°F(-30°C to 65°C)
Storage temperature	-104°F to 203°F(-40°C to 95°C)

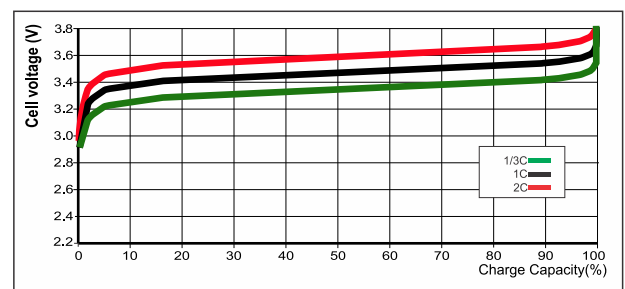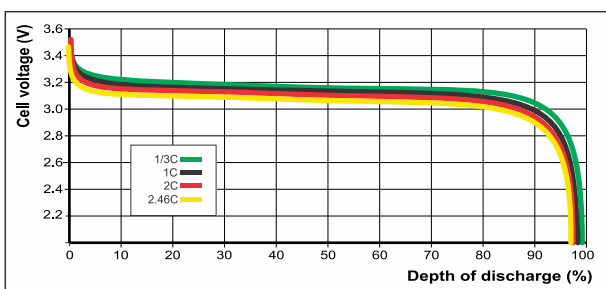

## BATTERY SPECIFICATION

Model	BNT-G48150
Nominal Voltage	51.2V
Nominal Capacity	150AH
Stored Energy	7.68KWH
Life Cycles	>3500 Times
Self Discharge	Max 3.2% Per Month
Continuous Charge Current	≤70A
Continuous Discharge Current	150A
Maximum Discharge Current	3C (30S)
Quick Charge Time	2-3h
Standard Charge Time	4-5h

## ENVIRONMENTAL

Charge Temperature Range	32°F - 113 °F (0°C - 45°C)
Discharge Temperature Range	-4°F - 140°F (-20°C - 60°C)
Storage Temperature Range	-14°F - 95°F (-10°C - 35°C)

## MECHANICAL

Cell Circuit Pattern	16 cells in series
Cell Assembly	3.2V 150AH
Battery Body Material	Metal+Powder Coating
Weight	137.35LBS(62.3KG)
Dimension(L*W*H)	690*270*240mm
IP Class	IP 65

BNT products are lithium-ion battery packs with integrated golf cart battery system. They are designed to replace the lead-acid batteries and are available for drop-in replacement in Club Car, EZ-GO, Yamaha.,etc, vehicles easily.

The design life of the golf cart batteries is 15 years and we offer a five-year warranty. BNT batteries can save up to at least 70% expenditures for you in five years .

## CONTACT

Tel: +86 592 6032128

Mob&WeChat&Whatsapp:  
+8615960220961

## CUSTOMER SERVICE

sales@bntbattery.com

Hours of operation:  
9:00am - 17:30 pm



LEARN MORE ON:

[www.bntbattery.com](http://www.bntbattery.com)